




DSD 40K CRANE BODY

15,000 - 19,500 Lb. G.V.W.R. Chassis


DSD SPECIFICATIONS	MODEL	
	DSD 60	DSD 84
Body Length	109"	133"
Overall Width	96"	96"
Front Height	46	46
Rear Height	43	43
Floor Width	49.5"	49.5"
Compartment Depth	22"	22"
Floor to top of Compartment	24"	24"
Front Compartment Length	35"	38"
Second Compartment Length	N/A	21"
Third Compartment Length	N/A	N/A
Horizontal Compartment Length	48"	48"
Rear Compartment Length	26"	26"
Optional Oxy/Ace Compartment Height	60"	60"
Approximate Base Body Weight	2340	2750

Our Promise To You:

" No Compromise"
in Providing the
Very Best Equipment
Available !

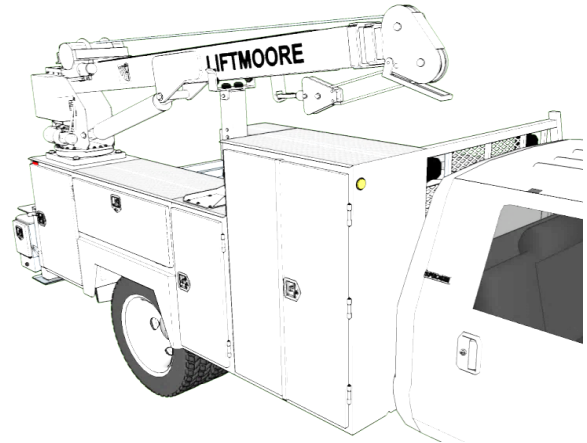

** DSD Chassis Requirements : 15,000 - 19,500 Lbs. G.V.W.R.
Minimum For Body And Chassis Only. Does Not Address Chassis
Limitations Imposed By Crane Manufacturer.

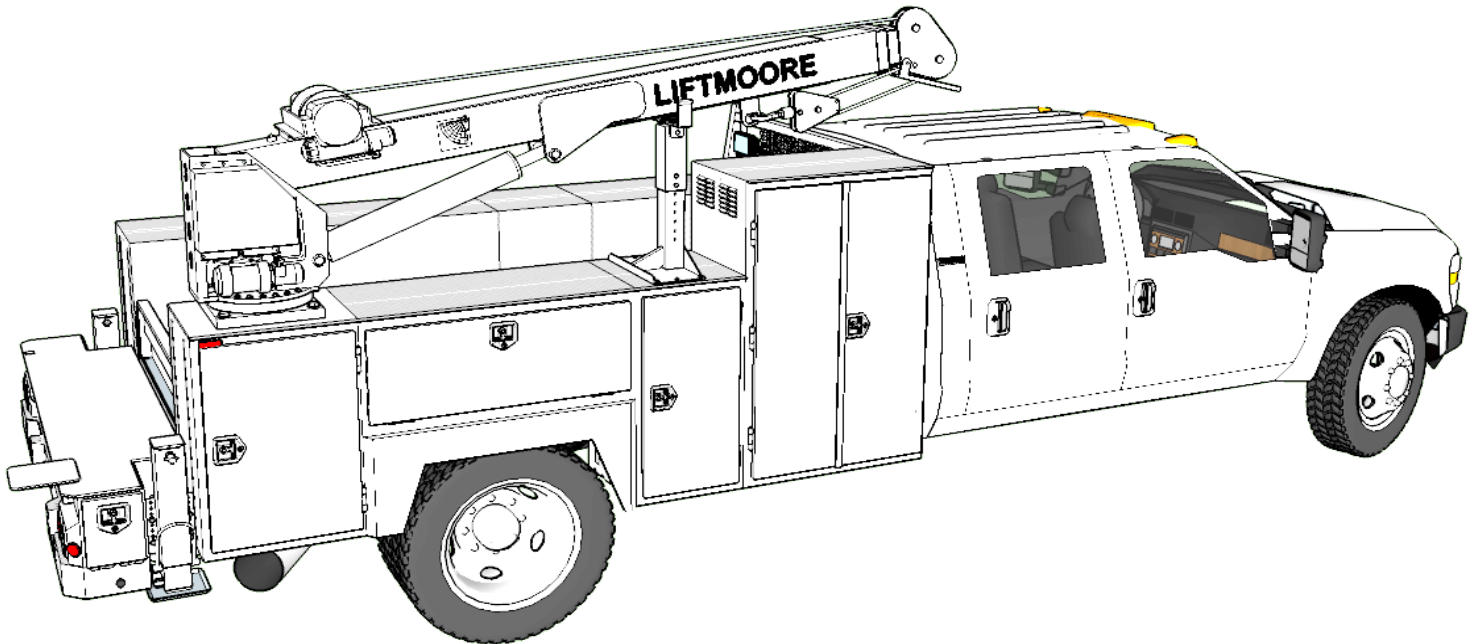

DSD 84 CB with O/A and Tailshelf Option

For Standard Features and Options See Reverse Side

STANDARD FEATURES 40K & 50K MODELS

- * **Body Subframe: 6" X 3/16" Crossmembers, 10 Ga Longitudinal Floor Reinforcement 3/16" Torsion Box Subframe for Rigidity**
- * **Low Floor Height (Only 6" above Chassis Frame)**
- * **Floor: 1/8" Treadplate**
- * **Compartment Tops and Rears: 1/8" Treadplate**
- * **Crane Compartment: 3/8" H.R. Steel with 1/2" H.R. Top Plate and 4X3X 1/2" angle reinforcement. Completely open for Storage**
- * **Major Body Components: 12 Ga. and 10 Ga. H.R.P.O.**
- * **Body Designed With Appropriate Material Eliminating Overlays with Rust Pockets**
- * **Superior Weather Tight Double Panel Galvaneal Doors Automotive Type Replaceable Bulb Rubber Seals Over Center Spring Loaded Door Restraints Stainless Steel 3 Point Locking T-Handle Latches Greaseable XHD Hinges with 5/16" Stainless Steel Pins.**
- * **Spring Mounting Kit**
- * **22" Deep Compartments**
- * **12 Gauge Formed Tailgate/ Work Table**
- * **Die Formed Ribs in Front Bulk Head**
- * **Recessed Cargo Tie Down Rings**
- * **All exterior Welds are Continuous Fully Penetrating Welds. No Caulking is used on these bodies.**
- * **HD Shelf Support Channels that hold the shelf where You put it even on the Roughest Road**
- * **Anti - Rattle Shelf Dividers**
- * **A Factory Installed Wiring Loom is Provided with each Body**
- * **Stop, Turn, Tail Lights are Sealed Beams**
- * **Each Crane Body is Thoroughly Cleaned and Phosphatized Prior to the Application of 2 Mills of PPG Plural Component Epoxy Primer**

OPTIONAL EQUIPMENT ALL MODELS

- * **Drawer Storage Units Mounted on 300 lb. Accuride Slides available for any compartment.**
- * **A 600 lb. Slide out Mechanics Tool Tray**
- * **Material Storage Hooks for storage of Ropes, Cables, Cords, etc. These are available in Fixed, Swivel, and Sliding Swivel arrangements.**
- * **60" Tall Vented Oxygen / Acetylene Storage Compartment available in D - 1 or P - 1. The Compartment comes complete with Reinforced Floor with Bottle Retention Rings, Bottle Tie Downs, Gauge and Torch Holders, and a Hose Rack.**
- * **Oxygen / Acetylene compartment with vertical partition and 4 small adjustable shelves**
- * **Additional Adjustable Shelves and Dividers**
- * **Egg Crate Fastener Storage Drawer available in either Horizontal Compartment**
- * **Theft Deterrent Master Locking System**
- * **Cushioned Adjustable Boom Rest (shipped loose)**
- * **Hydraulic Crane Prep Package**
- * **Compartment Lights**
- * **HD Step Bumper**
- * **HD Step Bumper with Recessed 2" Ball Plate**
- * **HD Step Bumper with Manual Out and Down Outriggers with Spring Retract Legs.**
- * **HD Step Bumper with Manual Out and Down Outriggers with Spring Retract Legs with Tailshelf and Thru Compartment**
- * **Hyd. Outrigger/Work Platform/Through Comp.**
- * **Header with Work Light Brackets (no lights)**

Authorized Distributor :

**Outriggers Must Be Used On All Models
When Operating Crane !**

For the name of your nearest
Dutec distributor call
903-868-1917

